



## Boom Barrier



### Main Features :


- Motor : 24V DC Brushless Motor
- Opening / Closing Time : 3 Sec to 6 Sec
- Length: Up to 6mtr
- Telescopic Boom



### > Specifications :

Model	AGS-SFB30
Power supply	220-240V ~ 50/60 Hz
Motor	24V DC Brush less motor
Opening Time	3 to 6 sec
Max. power	140 W
Max. torque	300 Nm
Material	MS
Surface treatment	Pre-hot dip galvanized, 20µm thick + polyester powder coated
Encoder	Incremental, integrated in the motor
Deceleration type	Electronic + mechanical
Beam type	Rectangular and rounded
Max Boom Length	<6m
Ambient operating temperature	-20°C to +55°C
Protection class	Ip55 (Electronic control unit)
Weight	34 kg
Use frequency	Continuous use
Electronic equipment	E614
Certifications	CE, FCC, RoHS

### > Options Available:

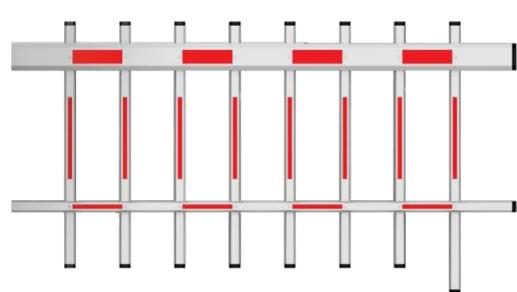

Disclaimer: The product images shown are for illustration purposes only and may not be an exact representation of the product. Technical specifications may be changed from time to time without any prior notice due to continuous enhancements in the product.



#644, Ground Floor, Staundi,  
District: Karnal, Haryana 132114



+91 9996010606



info@securewellindia.com



www.securewellindia.com